


REDUNDANT POWER SUPPLY

Total solution for redundant power supply

Target Market

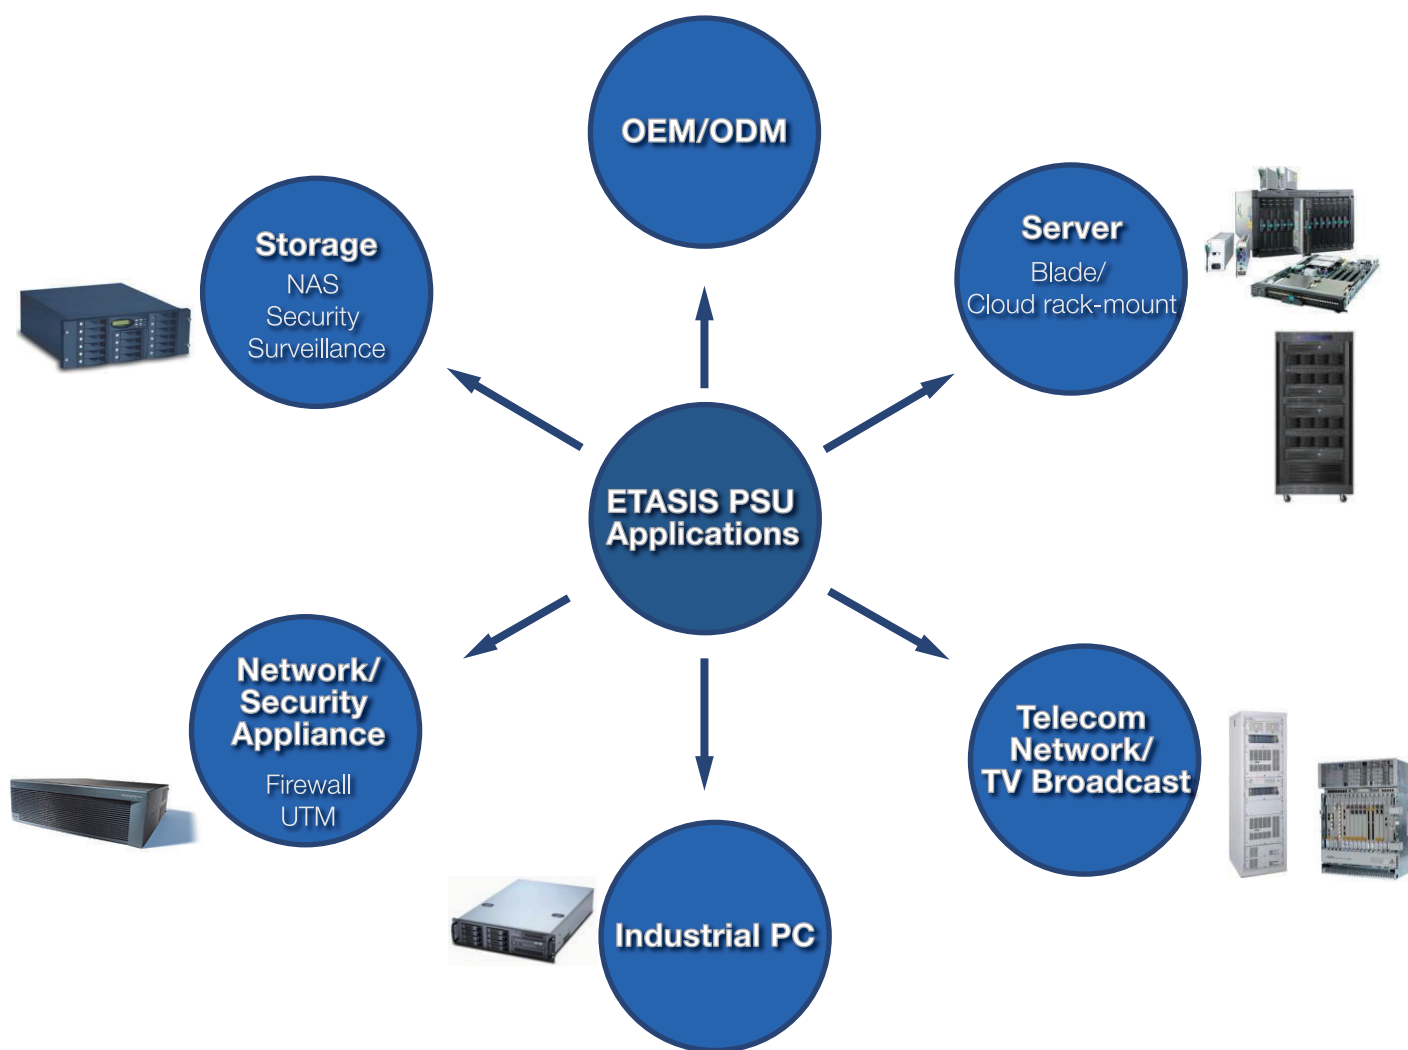

Product Application


Redundant Power Supply



IT/Data Center Application

CRPS Type 550W-2000W
73.5*40*185


Server - Multiple CPUs

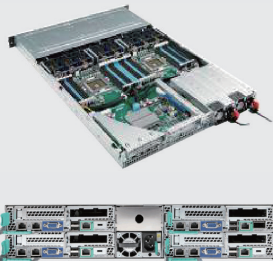

High-Bays Storage 2-4U



High-End Network
Security Appliance



Switch, Server/ Networking Application

Slim Type 100W-850W
106*41.5*260~355

Storage




Server -Dual CPUs



Dual/Four Nodes Server



Cloud -Computing Blade
Networking Appliance

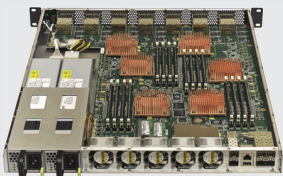

NAS, Storage/ Networking Application

Narrow Type 300W-550W
82*82*217

Storage - 2U NAS.RAID.



Server - Entry Server



High End Network
Security Appliance



AC/DC 1U Redundant Power Supply

Slim Type



ERP1U /100-280W /1+1 Slim type Redundant PSU

EFRP-S2287HPM Series

- Dimension(W*H*D mm): Module: 50.5*40*220; ERP1U: 106*41.5*260
- 80 Plus: Sliver
- PMBus Support (Tips: PMBUS for PDB only)
- Input Range: 100 ~240 Vac
- Output: 100W/150W/200W/250W/280W



Refer to product SPEC

Model Name	*EFRP-S107	EFRP-S2107H	*EFRP-S157	EFRP-S2157H	*EFRP-S207	EFRP-S2207H	*EFRP-S257	EFRP-S2257H	*EFRP-S287	EFRP-S2287H
Watt	100W	100W	150W	150W	200W	200W	250W	250W	280W	280W

*Module for redundant power supply



ERP1U /510-610W /1+1 Slim type Redundant PSU

EFRP-P2517H Series

- Dimension(W*H*D mm): Module: 50.5*40*220; ERP1U: 106*41.5*260
- 80 Plus: Platinum
- PMBus Support
- Input Range: 100 ~240 Vac
- Output: 510W/610W
- Safety Agency Requirements (TBD)



Refer to product SPEC

Model Name	*EFRP-P517	EFRP-P2517H	*EFRP-P617	EFRP-P2617H
Watt	510W	510W	610W	610W

*Module for redundant power supply



ERP1U /400-650W /1+1 Slim type Redundant PSU

EFRP-G2657H Series

- Dimension(W*H*D mm): Module: 50.5*40*300; ERP1U: 106*41.5*355
- 80 Plus: Gold
- PMBus Support
- Input Range: 100 ~240 Vac
- Output: 400W/500W/600W/650W



Refer to product SPEC

Model Name	*EFRP-G407	EFRP-G2407H	*EFRP-G507	EFRP-G2507H	*EFRP-G607	EFRP-G2607H	*EFRP-G657	EFRP-G2657H
Watt	400W	400W	500W	500W	600W	600W	650W	650W

*Module for redundant power supply

Disclaimer: Specification is subject to change without prior notice

AC/DC 1U Redundant Power Supply

Slim Type & Flex-ATX
CRPS Type

ERP1U /500-850W /1+1 Slim type Redundant PSU

EFRP-P2857H Series

- Dimension(W*H*D mm): Module: 50 5*40*300; ERP1U: 106*41 5*355
- 80 Plus: Platinum
- NEBS Compliant
- PMBus Support
- Input Range: 100 ~240 Vac
- Output: 500W/650W/750W/850W



Refer to product SPEC

Model Name	*EFRP-P507	EFRP-P2507H	*EFRP-P657	EFRP-P2657H	*EFRP-P757	EFRP-P2757H	*EFRP-P857	EFRP-P2857H
Watt	500W	500W	650W	650W	750W	750W	850W	850W

*Module for redundant power supply

ERP1U /500-650W /Flex-ATX Dual AC PSU

EFRP-P500D Series

- Dimension(W*H*D mm): 81.5*40*200
- 80 Plus: Platinum
- PMBus Support
- Dual AC input
- Input Range: 100 ~240 Vac
- Output: 500W/650W



Refer to product SPEC

Model Name	EFAP-P500D	EFAP-P650D
Watt	500W	650W

ERP1U /1300-2000W /CRPS type Redundant PSU

EFRP-PB0A Series

- Dimension(W*H*D mm): 73.5*40*195 (Tips: L=185 for 1300W; L=195 for 1600-2000W))
- 80 Plus: Platinum
- PMBus Support
- Input Range: 110 ~127Vac/ 200~240Vac/ 230~240Vac
- Output: 1300W/1600W/1800W/2000W
- Safety Agency Requirements (TBD)



Refer to product SPEC

Model Name	EFRP-PA3A	EFRP-PA6A	EFRP-PA8A	EFRP-PB0A
Watt	1300W	1600W	1800W	2000W

Disclaimer: Specification is subject to change without prior notice

AC/DC 1U & 2U Redundant Power Supply

Narrow Type
CRPS Type
Mini Type

ERP2U /550-800W /1+1 CRPS type Redundant PSU

EFRP-P280A Series

- Dimension(W*H*D mm): Module: 73.5*40*185; CRPS2U: 75.6*83.4*250
- 80 Plus: Platinum
- PMBus Support
- Input Range: 100 ~240 Vac
- Output: 500W/800W



Model Name	*EFRP-P55A	EFRP-P255A	*EFRP-P80A	EFRP-P280A
Watt	550W	550W	800W	800W

*Module for redundant power supply

ERP2U /300-550W /1+1 Narrow type Redundant PSU

EFRP-S2550C Series

- Dimension(W*H*D mm): Module: 81.5*40*160; ERP2U: 82*82*217
- 80 Plus: Silver
- PMBus Support
- Input Range: 100 ~240 Vac
- Output: 300W/400W/550W



Model Name	*EFRP-S300C	EFRP-S2300C	*EFRP-S400C	EFRP-S2400C	*EFRP-S550C	EFRP-S2550C
Watt	300W	300W	400W	400W	550W	550W

*Module for redundant power supply

ERP2U /460W-500W /1+1 Mini type Redundant PSU

EFRP-S2502 Series

- Dimension(W*H*D mm): Module: 122*40*152.5; ERP2U: 150*86*190
- PMBus Support
- Input Range: 100~240Vac
- Output: 460W/500W



Model Name	EFRP-2462	EFRP-S2502
Watt	460W	500W

Disclaimer: Specification is subject to change without prior notice

DC/DC Redundant Battery Backup Module

ERP1U /800W /Flex type BBM



EBBM-550

- Dimension(W*H*D mm): 81.5*40*160
- PMBus Support
- Input Range: Rated 12Vdc
- Discharge: 12V / 800W @ 2-3 min.
- Safety Agency Requirements (TBD)



Refer to product SPEC

ERP1U /800W /CRPS type BBM



EBBM-55A

- Dimension(W*H*D mm): 73.5*40*185
- PMBus Support
- Input Range: Rated 12Vdc
- Discharge: 12V / 550W @ 2-3 min. (updated: 12V/550W @ >3 minutes)
- Safety Agency Requirements (TBD)



Refer to product SPEC

ERP2U /550W /Redundant PSU with BBM



EFRP-S2550C

- Dimension(W*H*D mm): Module: 81.5*40*160; ERP2U: 82*82*217
- PMBus Support
- Input Range: 100 ~240 Vac
- Safety Agency Requirements (TBD)



Refer to product SPEC

ERP3U /750W-1000W /2+1 Redundant PSU with BBM



EFRP-S3550C Series

- Dimension(W*H*D mm):
Module: 81.5*40*160; ERP3U: 84*127*195
- PMBus Support
- Input Range: 100 ~240 Vac
- Safety Agency Requirements (TBD)



Refer to product SPEC

Model Name	EFRP-S3400C	EFRP-S3550C
Watt	750W	1000W